

GT-D1M (EC) DOOR TYPE

DIFFERENT SYSTEM DELIVERING SAME PERFORMANCE




POWER

POWERFUL washing standards. Sustained pressure to deliver extraordinary results. Selectable wash timing. Stainless steel impellers housing.



DURABLE

Stainless steel chamber build. Built from industrial grade 304 stainless steel. ENDURING performance with zero-trouble experience.



DIGITAL

DIGITAL displays and minimum cluttering provides a user-friendly experience. Simple usability and reliable components.



BUILT-IN

Same power delivery as the Standard Model, but now in an entire COMPLETE package with chemical dispensers.






TECHNICAL DATA

Model:	GT-D1M (EC)
Dimensions (mm):	697 (W) x 690 (D) x 1442 (H)
Loading height (mm):	420
Rack type (mm):	500 x 500
Machine net weight	122 kg

OPERATING INFORMATION

Wash temperature:	55°C - 65°C
Rinse temperature:	82°C - 90°C
Wash cycle (per rack):	60/90 sec 70/90 sec *(EC-LE)
Wash rate (per hour):	60/40 racks 50/36 racks *(EC-LE)
Rinse usage:	<2.0 liters per cycle
Wash tank capacity:	36.0 liters
Booster tank capacity:	10.0 liters
Chemical dispensers:	Optional fitting (sold separately)

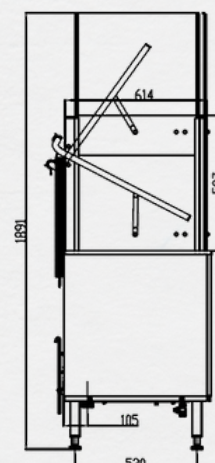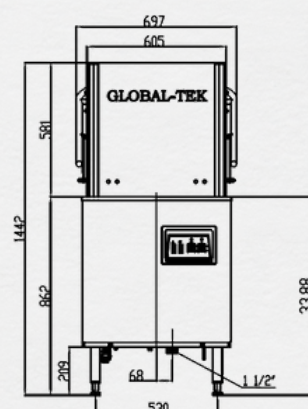

ELECTRICAL SPECIFICATIONS

Voltage supply	Booster tank	Wash tank	Wash pump	Total power loading
220V - 240V, 50/60Hz, 1 Phase	2.0 kW	2.0 kW	0.9 kW	3.5 kW, 15.0 A (Alternative Heating) 5.5 kW, 24.0 A (Full Heating)
380V - 415V, 50/60Hz, 3 Phase	12.0 kW	3.0 kW	0.9 kW	14.0 kW, 24.0 A (Alternative Heating) 17.0 kW, 31.5 A (Full Heating)
220V - 240V, 60Hz, 3 Phase	12.0 kW	3.0 kW	0.9 kW	14.0 kW, 46.5 A (Alternative Heating) 17.0 kW, 55.0 A (Full Heating)